

Rec'd PCT/PTO 29 DEC 2004

PCT/GB 04/004842



Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

10/519946

Bescheinigung

Certificate

Attestation

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

REC'D 07 JAN 2005

WIPO PCT

Patentanmeldung Nr. Patent application No. Demande de brevet n°

03257338.8

# PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

R C van Dijk



Anmeldung Nr:  
Application no.: 03257338.8  
Demande no:

Anmeldetag:  
Date of filing: 20.11.03  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

MBDA UK Limited  
Six Hills Way  
Stevenage,  
Hertfordshire SG1 2DA  
GRANDE BRETAGNE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se référer à la description.)

Signal processing system

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)  
revendiquée(s)  
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:


G02B6/00

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL  
PT RO SE SI SK TR LI

- 1 -

## SIGNAL PROCESSING SYSTEM



This invention relates to an electromagnetic signal processing system and more specifically, but not exclusively, to a system of processing an optical  
5 signal.

WO02/29436 teaches that a laser-radar receiver should comprise an array of optical fibres which are connected to at least one radiation detector, each optical fibre having different physical characteristics which result in known delays in the transmission time of pulsed electromagnetic radiation. Such  
10 delays are conveniently achieved by using optical fibres of differing lengths so that they operate as delay lines. Arrays of 3X3 optical fibres are taught, each optical fibre connected to single avalanche photo-diode (APD).

In our co-pending UK patent application number 0322564.6, we have taught that an electromagnetic signal processing system may comprise a  
15 plurality of optical fibre arrays, each optical fibre array having a cluster of optical fibres with their one ends oriented to receive electromagnetic radiation and arrange to transmit electromagnetic radiation to an array output, the array outputs being connected to transmit electromagnetic radiation in sequence to a signal detector input. In this co-pending application we have also taught various  
20 additional features for such signal processing systems.

According to the present invention a signal processing system has at least two processing channels, a plurality of optical fibres with their one ends oriented to receive electromagnetic radiation, and couplers interconnecting the other ends of the optical fibres such that electromagnetic radiation transmitted  
25 by the optical fibres will be coupled together and then directed into each processing channel. In this manner the same optical signal arriving at an array of optical fibres can be split into different channels for processing.

At least one of the processing channels preferably includes a processing board with an output to a signal detector. At least one of the processing boards  
30 may include electrical and/or optical signal processing components.

- 2 -

At least one of the processing channels is preferably arranged to transmit the electromagnetic radiation in sequence to a single detector input. This can be achieved as taught in our co-pending UK patent application 0322564.6. Preferably another processing channel may be arranged to transmit the electromagnetic radiation in sequence to another signal detector input, and the two processing channels incorporate different optical delays to minimise any range/position ambiguity.

One of the processing channels may be arranged to transmit electromagnetic radiation in sequence to a signal detector unit, and another processing channel arranged to transmit the electromagnetic radiation to a processing board configured to assess the range and depth of a target.

By providing at least two processing channels, it is possible for two processing channels to contain different signal detectors. This enables the electromagnetic radiation to be assessed with different sensitivities for different tasks, for different wavelengths, and for other different physical characteristics.

By having at least two processing channels, the invention also enables one processing channel to feed signals into at least one of the other channels. This feature greatly enhances the processing of received electromagnetic radiation.

The invention will now be described, by way of example only, with reference to the accompanying drawings in which: -

Figure 1 is a diagram illustrating our current technique of connecting optical fibres to a detector,

Figure 2 is a diagram illustrating one embodiment of the present invention, and

Figure 3 is a diagram illustrating a further embodiment of the present invention.

With reference to Figure 1, a signal processing system 10, comprises an optical fibre cluster or array 11 having nine optical fibres, one end of each fibre being depicted by the small circles 40. The set of nine fibres is positively

- 3 -

located in predetermined relative positions in an array board 41 which, in use, would be mounted to face the direction from which an electromagnetic signal may be received. Although the array board 41 is shown as being rectangular with optical fibres 40 arranged equally-spaced in a 3x3 matrix, the array board  
5 41 may be of any convenient shape and its cluster of optical fibres 40 may be any required number arranged in any suitable manner to receive electromagnetic radiation. The optical fibre array 41 is depicted in a simplified manner with only two optical fibres 42, 43 for the right-hand column being drawn. It should be understood that all nine optical fibres of the array board 41  
10 have different lengths, as shown in Figure 1, so that there is an in-built time delay between the transmission by each optical fibre. The optical fibres 42, 43 are shown joined by a 2-in-to-1 coupler 44 to a single output 45. The other optical fibres 40 forming the array board 41 would similarly be connected to the output 45 by respective couplers 44.

15 An optical system 46 is used to direct incoming electromagnetic signals on to the ends of the optical fibres 40.

The present invention is illustrated by Figure 2 in which the same reference numerals have been used to indicate equivalent features. The primary difference is that the coupler 44 of Figure 1 has been replaced by a 2-  
20 in-to-2 coupler 54 which couples the optical fibres 42 and 43 together, but then directs the combined signal into two separate processing channels defined by the output 45 and a second output 47. This configuration enables the processing channels 45, 47 to feed the electromagnetic radiation into different signal processors. One of the processing channels 45, 47 may be provided  
25 with a processing board with an output to a signal detector, the processing board including electrical and/or optical signal processing components.

The other processing channel 47 or 45 can be arranged to transmit the electromagnetic radiation in sequence to a signal detector input as taught by our aforesaid co-pending UK patent application.

30 In Figure 3, two array boards 41 and 141 are provided with electromagnetic radiation through the same optical system 46. The optical

- 4 -

fibres 42 and 43 are connected by a 2-in-to-1 connector 44 to an optical fibre 50, whereas optical fibres 142 and 143 from array board 141 are connected by a 2-in-to-1 connector 144 to an optical fibre 150.

5 It will be noted that the optical fibre 50 is longer than the optical fibre 150 whereby any signal transmitted by optical fibre 50 to coupler 154 will be delayed relative to a signal through the shorter optical fibre 150. This cascading of the optical fibres 50 and 150 enables the respective signals to be differentiated by a signal detector.

10 However, the coupler 154 serves to split the combined signal into the two processing channels 45 and 47 for separate processing in the same manner as has been described with reference to Figure 2.

Instead of using 2-in-to-2 couplers, N-in-to-M couplers may be used so that any number of inputs can be combined together and then split into any number of processing channels.

15 A primary advantage of the invention is that the same optical signal arriving at an array board 41, or 141, can be split into different processing channels.

20 In the real system there would be many other fibres feeding into the processing channels 45 and 47. Typically, multiple array boards 41 or 141 would be individually mounted to face a direction from which an electromagnetic signal might be received. They may face either in the same direction or may be oriented to receive electromagnetic radiation from different directions. Instead of being mounted in the array boards, the optical fibres 40 could be mounted directly through any convenient support structure.

25 In addition to directing the electromagnetic signal into two or more processing channels 45, 47, this approach also enables signals to be fed back from a stage in one channel to a stage in another channel, and vice versa, whereby detection of a signal characteristic in one processing channel can be used to affect the processing of the same signal in another channel. This  
30 enables the formation of very complex processing architectures.

- 5 -

In one example, one of the processing channels could have a cascaded structure as taught in our aforesaid co-pending UK patent application, whilst another processing channel could include a processing board incorporating electrical and/or optical components to process signals, the processing board  
6 being fed with all fibres from the array (not just from one cluster) into the signal detector. In this manner the detector would receive a series of pulses which would permit the range and depth of a target to be deduced. The depth of the target being the difference between the front and the back edges of the signal.

In another example, two processing channels could have cascaded  
10 structures as taught in our aforesaid co-pending UK patent application, but with the channels using different time delays. This configuration enables issues, such as the "range/position ambiguity" to be minimised or eliminated.

In a further example, the processing channels could contain different detectors, for instance with different sensitivities for different tasks, different  
15 wavelengths, and other differing parameters.

20

26

THE PATENT OFFICE  
III

20 NOV 2003

RECEIVED BY FAX

- 6 -

## CLAIMS

1. A signal processing system having at least two processing channels, a plurality of optical fibres with their one ends oriented to receive electromagnetic radiation, and couplers interconnecting the other ends of the optical fibres such that electromagnetic radiation transmitted by the optical fibres will be coupled together and then directed into each processing channel.
2. A signal processing system, according to Claim 1, in which at least one of the processing channels includes a processing board with an output to a signal detector.
3. A signal processing system, according to Claim 2, in which at least one of the processing boards includes electrical and/or optical signal processing components.
4. A signal processing system, according to any preceding claim, in which at least one of the processing channels is arranged to transmit the electromagnetic radiation in sequence to a signal detector input.
5. A signal processing system, according to Claim 4, in which another processing channel is arranged to transmit the electronic radiation in sequence to another signal detector input, and the two processing channels incorporate different optical delays to minimise any range/position ambiguity.
6. A signal processing system, according to Claim 1, in which one of the processing channels is arranged to transmit electromagnetic radiation in sequence to a signal detector unit, and another processing channel is arranged to transmit the electromagnetic radiation to a processing board configured to assess the range and depth of a target.
7. A signal processing system, according to any preceding claim, in which two processing channels contain different signal detectors.

0686600:20-NOV-03



- 7 -

8. A signal processing system, as in any preceding claim in which at least one processing channel is arranged to feed signals into at least one other channel.
9. A signal processing system substantially as described herein with reference to the accompanying drawings.

10

15

20

25

- 8 -

## Abstract

## Signal Processing System

A signal processing system (10) has a plurality of optical fibres (40, 42, 43) with their one ends (40) mounted in an array board (41) to receive electromagnetic radiation. A coupler (54) interconnects the other ends of the optical fibres (42, 43) such that electromagnetic radiation is first coupled together and then directed into two or more processing channels (45, 47).

THE PATENT OFF.  
III  
20 NOV 2003  
RECEIVED BY F

THE PATENT OFFICE  
III  
20 NOV 21  
RECEIVED B

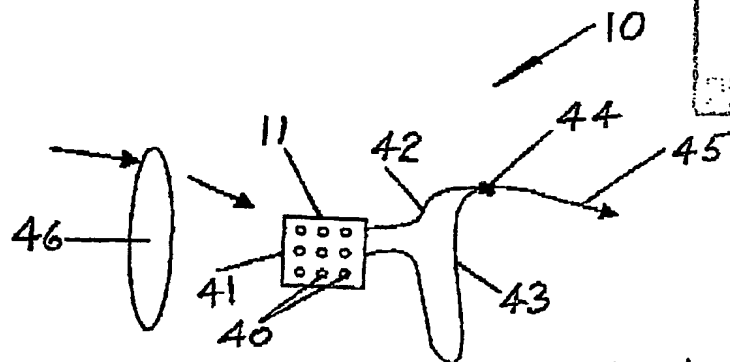


FIG. 1

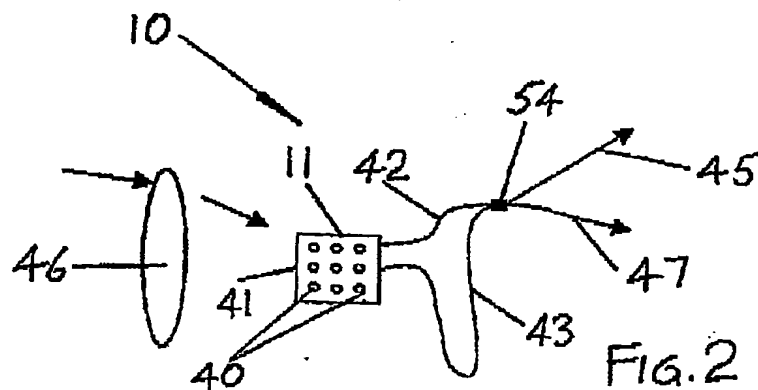


FIG. 2

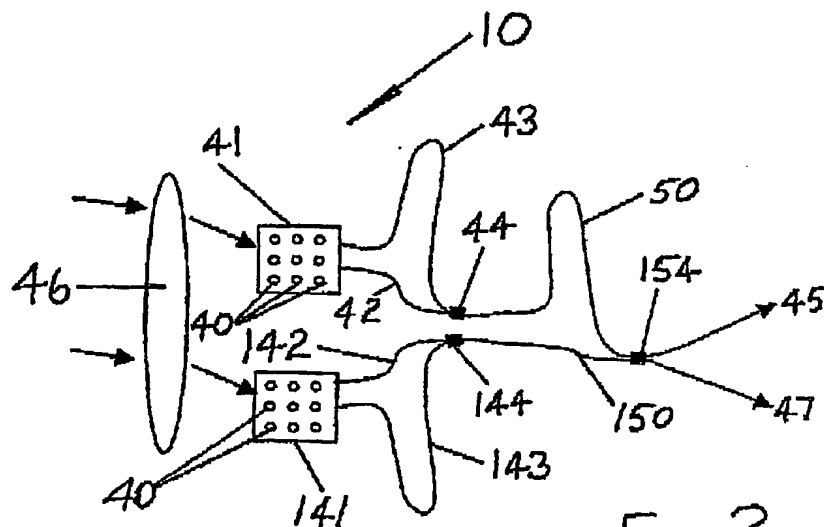


FIG. 3

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☒ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**